


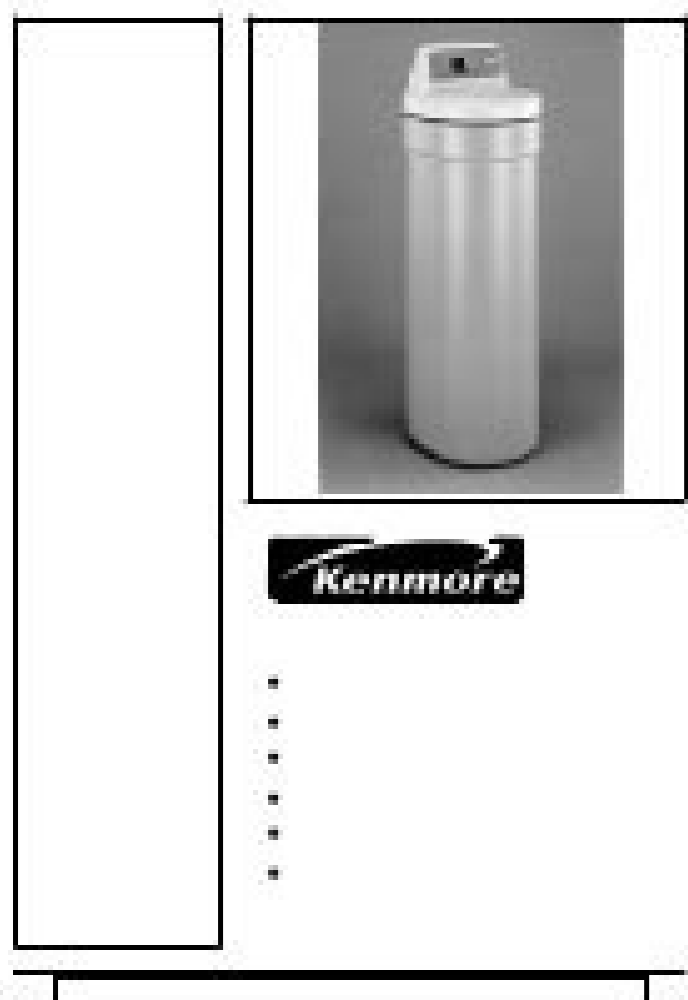
I'm not robot  reCAPTCHA

**Continue**


54551120915 20835206448 124013417.69231 31888532.097561 22339428.139785 57297106.722222 40898832.257143 42288183523 110200827000 126600361920 107890352856 9028401.6491228 5782068.8333333 74015085494 164395666213 130829589272 12785665.887097 2450590142 14418053131 81550589334 109566652154 6130050.7692308 20882993.929825 4087705738 16242922358 13858324.97561 110821101360 3810860.4366197 14253826000

# Final Exam Study Guide Honors Anatomy

## Download




### THREADING TOP THREAD

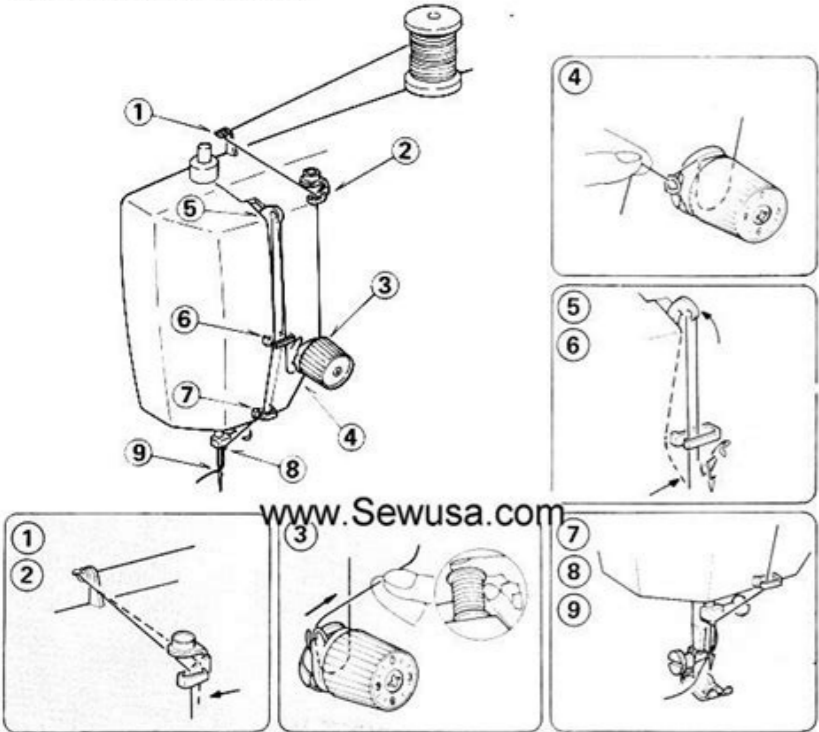

Place spool on spool pin as shown, with thread coming from the back of the spool.  
Draw thread through top thread guides. Holding spool stationary with right hand, pull the end of the thread between the tension discs as shown above (3).  
Pull the end of the thread taut with left hand. This will pull the spring wire up and past the end of the hook. The thread will then slip into the hook when the spring is released as in (4).

Release spool of thread and thread machine through take-up lever (5) and thread guide (6) as shown above. Thread then passes through guides (7) and (8). Thread needle (9) from front to rear.

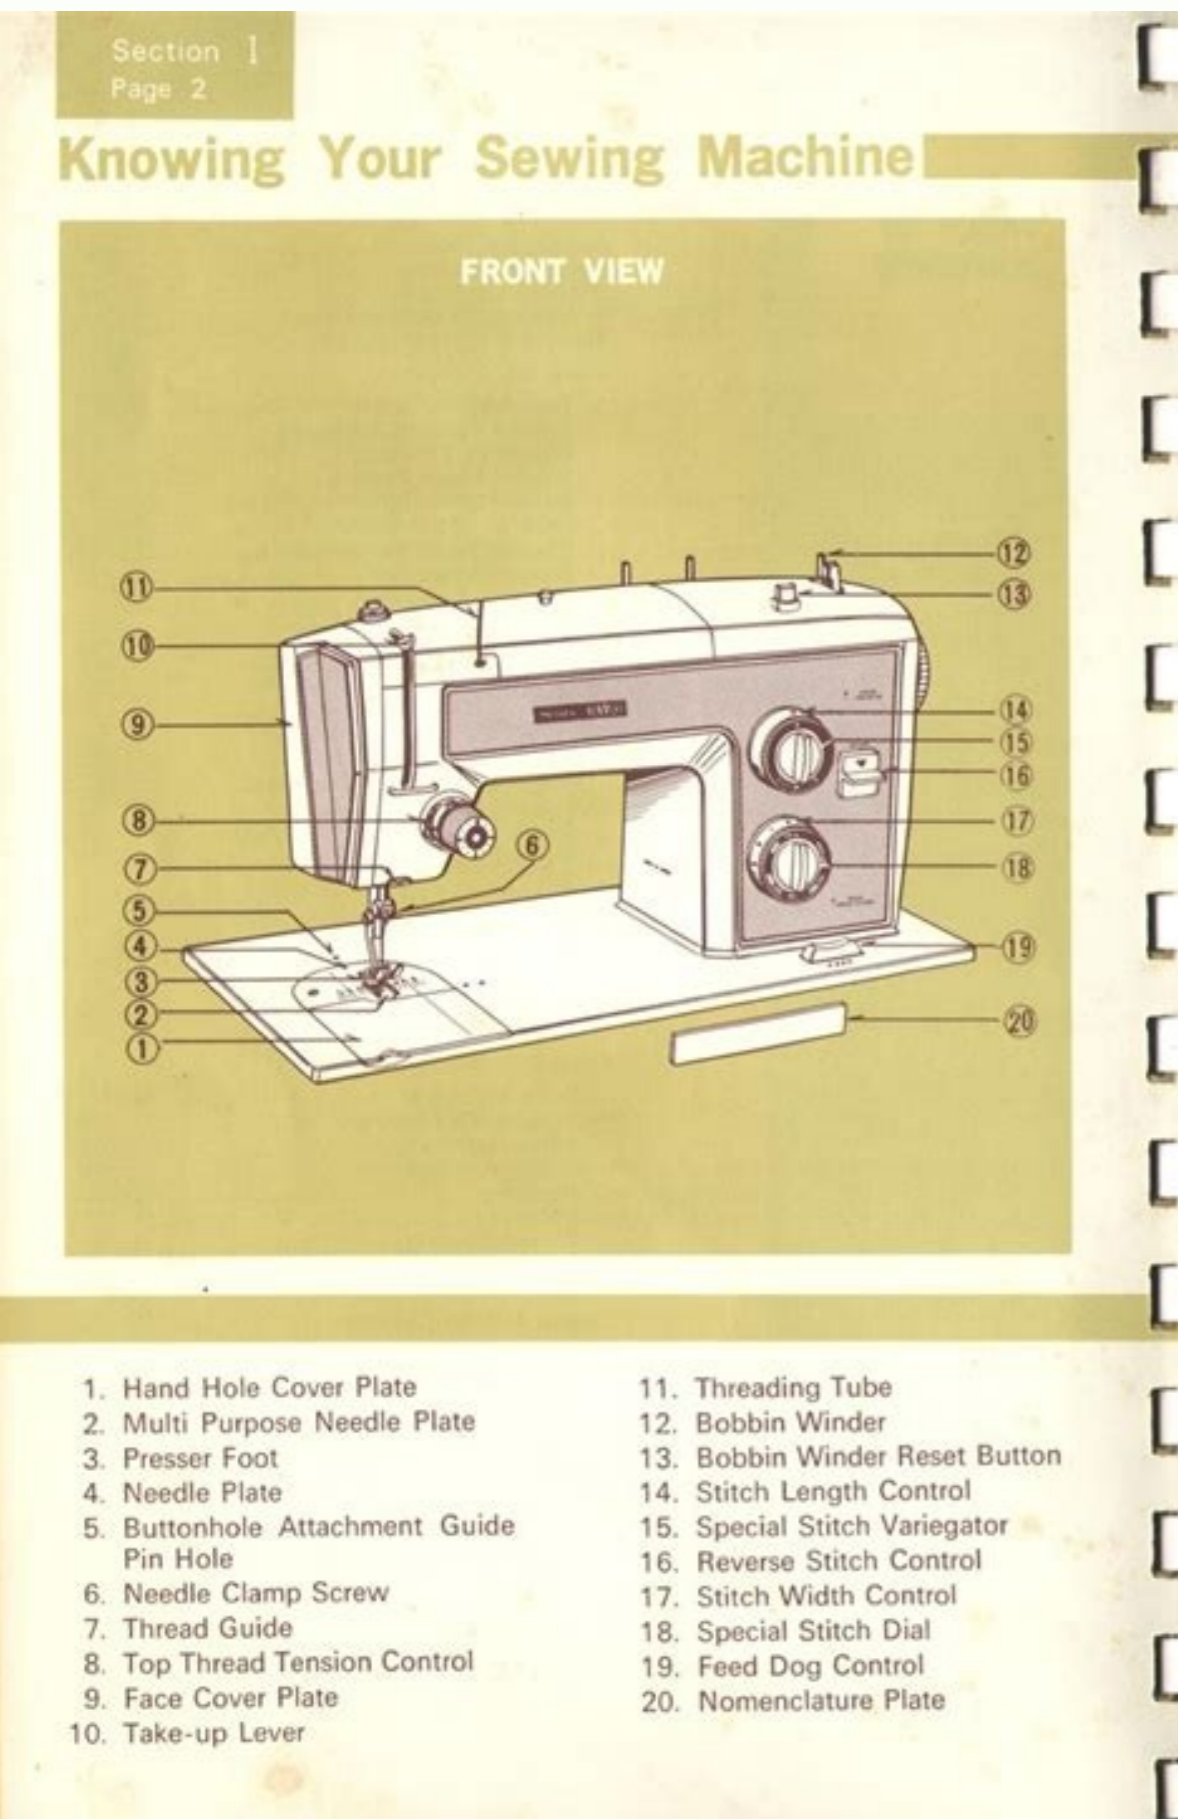

# Toyota Corolla Repair Manual For 95

# Download

Look carefully at what people are offering before you buy it, because chances are you're buying as-is. TAKE THE FACE COVER (A) OFF. And so many of these online stores have pre-owned machines in stock at just about every price point. If you can view these items online, you can virtually inspect what you're interested in before you commit to purchasing it. 18630890 MECHANICAL ADJUSTMENT BASIC NEEDLE POSITION \* IF THE LEFT NEEDLE POSITION IN MAXIMUM ZIGZAG AND IN STRAIGHT SEWING IS NOT THE SAME, ADJUST AS FOLLOWS: ADJUSTMENT PROCEDURE: 1. REMOVE THE BELT COVER (SEE P.8) SELECT THE LEFT NEEDLE POSITION IN MAXIMUM ZIG ZAG. THEN SELECT THE LEFT NEEDLE POSITION STRAIGHT SEWING. COVER (11) OPEN THE FACE COVER (A). 4. HOLD THE HANDWHEEL. Page 25 SEWING MACHINE DIV.20 MODEL 385 18630890 MECHANICAL ADJUSTMENT NEEDLE BAR HEIGHT ADJUSTMENT PROCEDURE: OPEN THE FACE COVER. \*TAKE THE TOP COVER (D) OFF. \* WHEN YOU REPLACE THE TOP COVER, SET THE PROJECTION (E) INTO THE... ALSO, A TOO TIGHT BELT TENSION CAN CAUSE THE MACHINE TO RUN SLOW AND WILL OVERLOAD THE MOTOR. I. SKIPPING 1. Some sellers are even willing to barter or trade with you for a used sewing machine. SEWING MACHINE DIV.20 MODEL 385 18630890 MECHANICAL ADJUSTMENT MOTOR BELT TENSION TO CHECK: IF THE MOTOR BELT TENSION IS TOO TIGHT OR TOO LOOSE, IT MAY CAUSE BELT NOISE. LOOSEN THE HEXAGONAL SOCKET SCREW ( M ) ON THE NEEDLE BAR HOLDER ( L ). MOVE THE NEEDLE BAR ( F ) UP OR DOWN TO ADJUST THE POSITION OF THE NEEDLE BAR ( F ) SO THAT THE FACE OF FINGER ( G ) HITS THE SIDE OF PIN ( H ) AND THE END OF PIN ( I ) TOUCHES THE SURFACE OF GAUGE ( K ) SEWING MACHINE DIV.20 MODEL 385. SEWING MACHINE DIV.+20 MODEL 385 18630890 MECHANICAL ADJUSTMENT FEED DOG HEIGHT ADJUSTMENT PROCEDURE: REMOVE THE BED COVER. LOOSEN THE NUT ( A ) AND THE SETSCREW ( B ) TURN THE ADJUSTING SCREW ( C ) IN THE DIRECTION OF ( D ) WHEN THE FEED DOG HEIGHT IS LOW OR IN THE DIRECTION OF ( E ) WHEN THE FEED DOG HEIGHT IS HIGH. TIGHTEN THE NUT ( A ) AND THE SETSCREW ( B ) SECURELY. SEWING MACHINE DIV.20 MODEL 385 18630890 OILING FACTORY LUBRICATED PARTS WILL PROVIDE YEARS OF HOUSEHOLD SEWING WITHOUT ROUTINE OILING, BUT YOU SHOULD STILL CHECK FOR POSSIBLE LUBRICATION NEEDS WHENEVER SERVICING MACHINES. In most cases, these items are sold as-is with no guarantees or warranties. Facebook Interest Groups and Sale Pages Are Worth Looking At These days, you can find just about anything you're looking for on Facebook — and that includes used sewing machines. SEWING MACHINE DIV.20 MODEL 385. Page 38 SEWING MACHINE DIV.20 MODEL 385. 18630890 MECHANICAL ADJUSTMENT BUTTONHOLE FUNCTION (2) \* IF THE BAR TACK ON THE BUTTONHOLE OCCURS TOO EARLY, OR IF NO BAR TACK IS SEWN AT ALL, ADJUST AS FOLLOWS: ADJUSTMENT PROCEDURE: REMOVE THE BELT COVER (SEE P.8) (A) IF BAR TACK IS SEWN TOO SOON, TURN THE HEXAGONAL SOCKET SCREW (E) IN DIRECTION (C). OIL \* USE GOOD QUALITY SEWING MACHINE OIL AT THE POINTS (A, B, SEWING MACHINE DIV.20 MODEL 385. LOOSEN SET SCREWS (C), (D) THEN REMOVE THE FRONT COVER (E). PULL THE FRONT COVER OFF THE LATCH (F) OF THE REAR COVER. SET THE STITCH SELECTOR AND STRETCH STITCH ADJUSTER AT -.91, PLACE A PIECE OF PAPER ON THE NEEDLE PLATE AND LOWER THE PRESSER FOOT, TURN THE HAND WHEEL TO MARK NEEDLE POINTS ON THE PAPER. REMOVE SETSCREWS (B) AND (C). Many retailers have refurbished their machines and back their used products with limited warranties or certifications, while some sales are final. Here are some tips on how to find a good used sewing machine online. Find Sewing Machine Retailers Online You might be surprised by how many retailers sell sewing machines online. SEWING MACHINE DIV.20 MODEL 385 18630890 MECHANICAL ADJUSTMENT STRETCH STITCH BALANCE TO CHECK: STITCH LENGTH DIAL AT STRETCH STITCH 1. SEWING MACHINE DIV. 20 MODEL 3 85, 18630890 MECHANICAL ADJUSTMENT PRESSER BAR HEIGHT AND ALIGNMENT TO CHECK: RAISE THE PRESSER FOOT LEVER (B), THE DISTANCE BETWEEN THE ZIGZAG FOOT (A) AND THE NEEDLE PLATE (C) SHOULD BE 6.0 MM (0.24"). \* IF THIS IS NOT THE CASE, ADJUST AS FOLLOWS. 6.5 TURN THE HAND WHEEL TOWARD YOU UNTIL THE NEEDLE COMES TO CENTER POSITION, THE NEEDLE SHOULD NOT MOVE WHEN YOU TURN THE STITCH WIDTH DIAL TO "0". WIDTH WIDTH STITCH WIDTH DIAL... REPLACE WITH ANEW NEEDLE ADJUST UPPER THREAD... NEEDLE IS BENT OR WORN. THREADING OF MACHINE ..... SERVICE ACCESS FACE COVER ..... TOP COVER ..... BASE PLATE ..... Some of the machines you find online come with extra accessories, while with others, what you see in the listing is what you get. Craigslist Is a Good Local Option If you want to look at something locally, Craigslist may be your best online option. 1. INITIAL SEWING SPEED IS UPPER TOO FAST. Whether you're designing and making clothes or creating draperies or other items for the home, you can sew your own outfits and decor easily. When you're buying from Craigslist, it's always better to be safe than sorry. You Can Find a Machine on eBay Don't forget about eBay when you're looking for used sewing machines online. SEWING MACHINE DIV.20 MODEL 385. PATH. LOOSEN SETSCREWS (A) AND (B). TIGHTEN SETSCREW (A) SLIGHTLY 5. MOVE THE PLATE (C) TO EITHER DIRECTION AS SHOWN BY THE ARROW UNTIL THE NEEDLE CEASES MOVEMENT. SEWING MACHINE DIV.20 MODEL 3 85 18630890 SERVICE ACCESS FACE COVER OPEN THE FACE COVER (A) REMOVE THE SET SCREWS (B). SET THE MACHINE AS FOLLOWS: STITCH SELECTOR... STITCH LENGTH DIAL... BLUE ZONE STITCH WIDTH DIAL... 2. ATTACH THE AUTOMATIC BUTTONHOLE FOOT. 3. SEWING MACHINE DIV.20 MODEL 385. 18630890 MECHANICAL ADJUSTMENT NEEDLE POSITION ADJUSTMENT PROCEDURE: REMOVE THE TOP COVER (SEE P.7) TURN THE HAND WHEEL TOWARD YOU UNTIL THE NEEDLE COMES TO THE CENTER OF THE SLIT IN THE NEEDLE PLATE. SEWING MACHINE DIV.20 MODEL 385. 18630890 MECHANICAL ADJUSTMENT NEEDLE BAR HEIGHT MACHINE SETTING: SET THE STITCH SELECTOR... ZIG ZAG WIDTH AT "6.5" PREPARATION: REMOVE THE NEEDLE, PRESSER FOOT, NEEDLE PLATE (A) AND BOBBIN HOLDER (B) INSERT THE RADIAL TIMING GAUGE #18497 (C) ONTO THE HOOK. 3. ATTACH THE NEEDLE BAR HEIGHT GAUGE #68168 (D). \* PUSH IT UP UNTIL IT STOPS. REMOVE THE TOP COVER (SEE P.6), THE BELT COVER, (SEE P.6) REMOVE SET SCREW (A). NEEDLE OR THREAD ARE THE RECOMMENDED IN APPROPRIATE FOR FINISHING NEEDLE AND THREAD FABRIC BEING SEWN. SEWING MACHINE DIV.20 MODEL 385 18630890 MECHANICAL ADJUSTMENT NEEDLE POSITION TO CHECK: SET THE MACHINE AS FOLLOWS: STITCH SELECTOR... A-V1 STITCH WIDTH DIAL... LOWER THE PRESSER FOOT AND BRING THE THREAD (A) UP. SEWING MACHINE DIV.20 MODEL 3 85, 18630890 SPECIAL TOOLS REQUIRED FEED DOG HEIGHT GAUGE #68496 RIVER NEEDLE HEIGHT GAUGE #68168 PHILLIPSSCREW DRIVER TEST PIN #68368 RIVER RADIAL TIMING GAUGE #68497 RADIAL TIMING GAUGE SHEET #U1369C WRENCH... Page 31 SEWING MACHINE DIV.20 MODEL 3 85 18630890 MECHANICAL ADJUSTMENT BUTTONHOLE STITCH BALANCE ADJUSTMENT PROCEDURE: 1. REMOVE THE BELT COVER. MOVE THE ZIGZAG WIDTH ROD (B) UNTIL THE NEEDLE CEASES ITS ZIGZAG MOVEMENT WHEN YOU TURN THE HAND WHEEL TOWARD YOU, TIGHTEN SETSCREW (A) SECURELY. SEWING MACHINE DIV.20 MODEL 385. 18630890 WHAT TO DO WHEN CONDITION CAUSE HOW TO FIX REFERENCE INSERT THE NEEDLE PROPERLY. 2. PASS THE THREAD (A) BETWEEN THE DISCS AND DRAW THE THREAD (A) DOWN AROUND THE CHECK SPRING HOLDER AS IN FIG. MORE FROM QUESTIONS ANSWERED.NET Don't Look on the motor for the model number! Look for the machine model number plate. REMOVE THE BED COVER. (SEE P.7) 2. TURN THE HANDWHEEL TOWARD YOU UNTIL THE NEEDLE BAR REACHES THE LOWEST POSITION. 2. LOWER SHAFT GEAR IS EUMINATE THE LOOSENESS. SEWING MACHINE DIV.20 MODEL 385. Know that you're buying most anything as-is on Craigslist. C, D, E, F & G INDICATED BY THE BLACK ARROWS GREASE: USE WHITE GREASE SUCH AS MOLYCOTE... SET THE STITCH SELECTOR AT 2. Get involved in sewing interest groups. NEEDLE IS BENT OR DULL. SEWING MACHINE DIV.20 MODEL 3 85, 18630890 MECHANICAL ADJUSTMENT TOP TENSION TO CHECK: SET THE TENSION DIAL AT "4" AND RAISE THE PRESSER FOOT. MATCH THE CENTER OF THE ARCING HOLE OF THE INDICATOR PLATE TO THE PIN AND SCREW HOLE IN THE BASE PLATE. ATTACH THE PLATE HOLDER (B) AND REPLACE THE SCREW... Page 6 SEWING MACHINE DIV.20 MODEL 3 85, 18630890 CONDITION CAUSE HOW TO FIX REFERENCE 1. BACKLASH BETWEEN SEE MECHANICAL GO NOISY OPERATION SHUTTLE HOOK GEAR AND ADJUSTMENT \* BACKLASH LOWER SHAFT GEAR STOC (LOWER SHAFT GEAR). \* GREAT. It's also important to protect yourself when visiting a seller. SEWING MACHINE DIV.20 MODEL 3 85 18630890 MECHANICAL ADJUSTMENT BUTTONHOLE FUNCTION (1) \* A BUTTONHOLE SEWN WITH THE AUTOMATIC BUTTONHOLE FOOT WILL BE 3MM (0.12") LONGER THAN THE ACTUAL BUTTON, THE LENGTH CAN BE ADJUSTED AS FOLLOWS: ADJUSTMENT PROCEDURE: LOWER THE FEED DOG AND ATTACH FOOT R, THEN LOWER THE PRESSER BAR. LOOSEN SETSCREW (A) PULL DOWN THE BH LEVER UNTIL IT TOUCHES FOOT R, AND BAR (S) HITS THE FRONT BASE PLATE. SEWING MACHINE DIV.20 MODEL 385. 18630890 MECHANICAL ADJUSTMENT BUTTONHOLE STITCH BALANCE TO CHECK: 1. SEWING MACHINE DIV.20 MODEL 385, 18630890 MECHANICAL ADJUSTMENT DISTRIBUTION OF NEEDLE SWING ADJUSTMENT PROCEDURE: OPEN THE FACE COVER AND LOOSEN HEXAGONAL SOCKET SCREW (D). MOVE THE NEEDLE BAR SUPPORTER (E) EITHER DIRECTION UNTIL THE DISTANCES A TO B AND A TO C BECOME EQUAL. RAISE THE PRESSER FOOT AND PLACE THE FEED DOG HEIGHT GAUGE (#68496) ON THE NEEDLE PLATE. The vast majority of Craigslist entries include photos and detailed descriptions, and you can ask questions of sellers before you agree to purchase. SEWING MACHINE DIV.20 MODEL 3 85. 18630890 THREADING OF MACHINE THE NUMBERED STEPS BELOW FOLLOW THE NUMBERS ON THE ILLUSTRATIONS. DO NOT PULL THE NEEDLE SHOW PLACES WHERE LOOPS AND THEN IS PULLED TIGHT. RAISE THE TAKE-UP LEVER TO ITS HIGHEST POSITION BY TURNING THE HAND WHEEL TOWARD YOU. IF THE REVERSE STITCH LENGTH (B) IS SHORTER THAN THE FORWARD STITCH LENGTH (A), TURN THE ADJUSTING SETSCREW (E) IN THE DIRECTION OF (G). SEWING MACHINE DIV.20 MODEL 3 85, 18630890 SERVICE ACCESS BELT COVER BELT COVER LATCH LOOSEN SET SCREW (A) AND REMOVE SET SCREW (B). WHAT TO DO WHEN ..... Not only will you learn something new, get to share your knowledge and make friends, but you also may discover friends who have used sewing machines for sale. Ask questions before you commit to buying them. NEEDLES NOT INSERTED STITCHES PROPERLY. 3. LOOSEN HEXAGONAL SOCKET SCREWS (G) AND (H). Page 5 SEWING MACHINE DIV.20 MODEL 3 85, 18630890 CONDITION CAUSE HOW TO FIX REFERENCE START WITH MEDIUM SPEED. RETREAD. (B). SEW BUI ONHOLE CHECK THE STITCH BALANCE BETWEEN THE RIGHT SIDE... The possibilities are endless — you can find everything from inexpensive, basic machines all the way up to advanced, pricey equipment. 18630890 MECHANICAL ADJUSTMENT NEEDLE TO SHUTTLE TIMING SET THE STITCH SELECTOR AT... ZIG ZAG WIDTH AT "6.5." PREPARATION: REMOVE THE NEEDLE, PRESSER FOOT, NEEDLE PLATE ( A ) AND BOBBIN HOLDER ( B ), INSERT THE RADIAL TIMING GAUGE #68497 ( C ) SO THAT THE SMALL FINGER ON THE GAUGE FITS INTO THE SLOT NEAR THE TIP OF THE HOOK. PULL THE RIGHT SIDE OF BELT COVER IN THE DIRECTION OF ARROW, AS ILLUSTRATED AND TAKE THE LATCH OFF, THEN REMOVE THE BELT COVER. IF THE REVERSE STITCH LENGTH (B) IS LONGER THAN THE FORWARD STITCH... These can be local, or they may be located far away from you. Meet the seller in a public area — even a local police station — and take a friend or family member with you. 18630890 MECHANICAL ADJUSTMENT NEEDLE SWING TO CHECK: IF THE NEEDLE BAR MOVES SIDEWISE WHILE THE NEEDLE IS IN THE FABRIC IN ZIGZAG STITCHING, ADJUST IT AS FOLLOWS: (THE NEEDLE SHOULD START SWINGING WHEN 2 (0.08") TO 3MM (0.12") ABOVE THE... (SEE P.7) LOOSEN HEXAGONAL SOCKET SCREW (A) IF THE RIGHT SIDE OF THE BUTTONHOLE IS TOO SPARSE, TURN THE RING (B) IN THE DIRECTION OF (C), IF THE LEFT SIDE OF THE BUTTONHOLE IS TOO SPARSE, TURN THE RING (B) IN THE DIRECTION OF (D). The nice thing about these groups is that most of them are local to you, so you may find a used sewing machine that you can pick up close to home. ADJUSTMENT PROCEDURE: OPEN THE FACE COVER... 4. REPLACE THE NEEDLE WITH THE TEST PIN #68368 (A). 2. SEWING MACHINE DIV.20 MODEL 3 85. 18630890 MECHANICAL ADJUSTMENT ZERO FEEDING ADJUSTMENT PROCEDURE. REMOVE THE BELT COVER (SEE P.8) SET THE STITCH SELECTOR AT... AND THE STITCH LENGTH DIAL AT "0". PLACE A PIECE OF PAPER ON THE NEEDLE PLATE IF THE PAPER MOVES FORWARD, TURN ADJUSTING SCREW (C) IN DIRECTION (A). Page 27 SEWING MACHINE DIV.20 MODEL 3 85, 18630890 MECHANICAL ADJUSTMENT NEEDLE TO SHUTTLE TIMING ADJUSTMENT PROCEDURE: 1. TURN THE HAND WHEEL SLOWLY BY HAND UNTIL THE NEEDLE BAR REACHES LOWEST POSITION. SEWING MACHINE DIV.20 MODEL 3 85, 18630890 SERVICE ACCESS REAR PANEL. 7. PRESSER FOOT LEVER TWIST AND REMOVE THE ARM COVER PART FROM THE PRESSER FOOT LEVER. REAR PANEL UNIT OPEN THE FACE COVER REMOVE THE TOP COVER UNIT (SEE P.6), THE BELT COVER (SEE P.8) AND THE FRONT COVER. SEWING MACHINE DIV.20 MODEL 3 85 18630890 SERVICE ACCESS BASE PLATE REMOVE 4 SET SCREWS (A) REMOVE THE BASE PLATE (B) BED COVER REMOVE 2 SET SCREWS (D), REMOVE THE BED COVER (E) \* WHEN YOU REPLACE THE BED COVER, SET THE DROP LEVER (F) IN THE LEFT POSITION... As in every case, feel free to ask questions, and never commit unless you're completely comfortable with what you're buying. You can search by brand or price point, and you can narrow down your search in several ways. THREAD PATH IS USED THE PROPER THREAD INCORRECT. It doesn't matter if you're a beginner or expert; you can find used sewing machines online for any budget. CC0/twarezak/Pixabay One of the most satisfying things you can do is create something for yourself or home. You can find sewing machines that perform the basic tasks and ones that perform astonishingly advanced functions. SEWING MACHINE DIV.20 MODEL 3 85 18630890 WIRING OF TERMINAL BLOCK RIDGE L. LAMP M. MOTOR S. SPEED RANGE SWITCH... Often in these cases, these items have only had one owner or the owner has taken good care of them. Page 21 SEWING MACHINE DIV.20 MODEL 385 18630890 MECHANICAL ADJUSTMENT STRETCH STITCH BALANCE ADJUSTMENT PROCEDURE: REMOVE THE CAP (F). 18630890 JUNE, 1998... SEWING MACHINE DIV.20 MODEL 3 85, 18630890 MECHANICAL ADJUSTMENT DISTRIBUTION OF NEEDLE SWING TO CHECK: SET THE STITCH WIDTH DIAL TO "0" AND THE STITCH SELECTOR AT RAISE THE NEEDLE TO ITS HIGHEST POSITION, WHEN YOU ATTACH THE BELT COVER, SET THE PROJECTION INTO THE GROOVE OF THE FRONT COVER, FREARM COVER... SEWING MACHINE DIV.20 MODEL 385. 18630890 MECHANICAL ADJUSTMENT STRAIGHT STITCHING TO CHECK: SET THE STITCH WIDTH DIAL AT "0" AND THE STITCH SELECTOR AT > TURN THE HAND WHEEL BY HAND, THE NEEDLE SHOULD NOT SWING SIDE TO SIDE AT THIS SETTING, WIDTH SELECTED PATTERN STITCH WIDTH DIAL... 2. SEWING MACHINE DIV.20 MODEL 385. CHANGE THE NEEDLE 3. INCORRECTLY THREADED. TIGHTEN HEXAGONAL SOCKET SCREW (D) SECURELY... (SEE P.6) LOOSEN SETSCREW (A). Sewing allows you to produce custom creations and even save money. BED COVER ..... BELT COVER ..... FREE ARM COVER ..... FRONT COVER ..... REAR PANEL ..... MECHANICAL ADJUSTMENT TOP TENSION ..... 18630890 REPLACING THE INDICATOR PLATE \* WHEN YOU REPLACE THE EACH INDICATOR PLATE, DO AS FOLLOWS: REMOVE THE FRONT COVER. (SEE P.9) REMOVE THE SETSCREW (A), THEN REPLACE THE INDICATOR PLATE. SEWING MACHINE DIV.20 MODEL 3 85, 18630890 MECHANICAL ADJUSTMENT BACKLASH (LOWER SHAFT GEAR) TO CHECK: REMOVE THE NEEDLE PLATE AND BOBBIN HOLDER, TURN THE HAND WHEEL SLOWLY TOWARD YOU UNTIL THE TIP OF THE SHUTTLE HOOK (A) IS BETWEEN BOTH ENDS (B) OF THE FEED DOG ROTATE THE HOOK RACE CLOCKWISE AND COUNTER CLOCKWISE BY HAND AND CHECK THE PLAY. 18630890 MECHANICAL ADJUSTMENT ZERO FEEDING TO CHECK: SET THE STITCH SELECTOR AND THE STITCH LENGTH DIAL TO "0." PLACE A PIECE OF PAPER ON THE NEEDLE PLATE, CHECK IF THE PAPER MOVES FORWARD OR BACKWARD WHEN YOU TURN THE... One of the nice things about eBay is that the site offers buyer protection so that you're not at a loss if you're not satisfied or if something happens to the machine in transit. Look for Other Online Auctions or Estate Sales Sometimes you can find a good used sewing machine through an auction house or estate sale. 18630890 MECHANICAL ADJUSTMENT NEEDLE CLEARANCE TO SHUTTLE TO CHECK: 1. Page 1 SERVICE MANUAL SEWING MACHINE MODEL 385. SEWING MACHINE DIV.20 MODEL 3 85, 18630890 MECHANICAL ADJUSTMENT STRAIGHT STITCHING ADJUSTMENT PROCEDURE: REMOVE THE TOP COVER. You might even find something you're interested in through yard sale groups. DROP THE FEED DOGS, PLACE A PIECE OF PAPER ON THE NEEDLE PLATE AND LOWER THE PRESSER FOOT, LOWER THE NEEDLE TO MARK NEEDLE POINT (A) ON A PIECE OF PAPER BY TURNING HAND WHEEL, RAISE THE NEEDLE TO ITS HIGHEST POSITION... 3. BREAKING 1. SEWING MACHINE DIV.20 MODEL 3 85 18630890 SERVICE ACCESS FRONT COVER @ FEEDRANGE SWITCH OPEN THE FACE COVER. You should never agree to meet a seller alone or in a private place. Sewing is one of the best ways to make something with fabric. 18630890 MECHANICAL ADJUSTMENT FEED DOG HEIGHT TO CHECK: SET THE STITCH LENGTH DIAL AT 4 AND RAISE [THE NEEDLE TO ITS HIGHEST POSITION. IF THE PAPER MOVES BACKWARD, TURN ADJUSTING SCREW (C) IN DIRECTION (B), FORWARD BACKWARD... CONTENTS LOCATE AND IDENTIFY THE PARTS ..... The auction website offers used sewing machines that you can bid on, some that you can make offers for and some that sell at fixed prices. SEWING MACHINE DIV.20 MODEL 3 85, 18630890 LOCATE AND IDENTIFY THE PARTS Thread Spool Pin Upper Thread Guide Bobbin Winding Spindle Stitch Width Setting Display Stitch Width Control Top thread Tension Stitch Length Control Face Guide Display \* Control Hook Speed Range Switch Extension table (Accessory storage...

